

Trolley shelters

S BS

S type

MODERN | SIMPLE | FRESH

The compact shape can be also used as a base for advertising materials placing on glass.

Aesthetic steel structure (full RAL colours) with flat roof and glass walls.

Double anti-corrosive protection ensures trouble-free operation for a long time.



Available lengths and widths:

Possible structure modifications:



long roof



short roof



extra (hidden connections)

Possible accessories:



advertising frame



back wall



shields



rolling doors



transparent doors



logo



closing crossbeam

Wall filling options:



glass







display




economic




cellular polycarbonate 8mm




internal width [m]	1.0	1.5	2.0	2.3	2.7
number of shopping trolley rows	1	2	3	3	4
shelter index	S1	S2	S3	S3+	S4
roof length [m]					
2.1	•	•	•	•	•
2.7	•	•	•	•	•
3.1	•	•	•	•	•
4.2	•	•	•	•	•




S1: 1 x




S2: 2 x



S3: 3 x




S3+: 3 x



S4: 4 x

Specification (S3 BS):

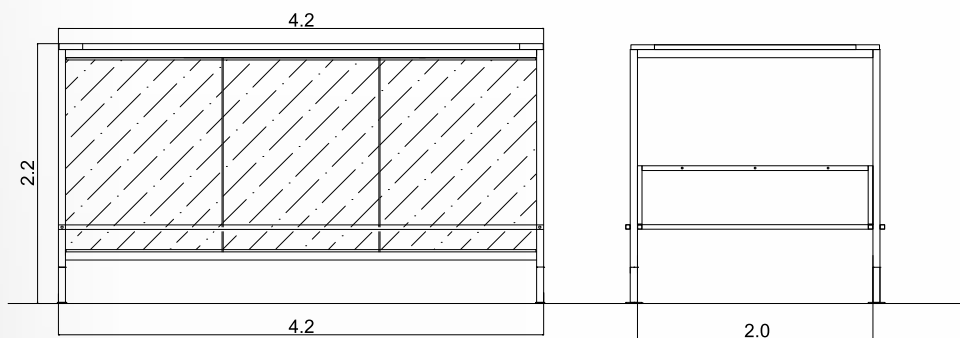



Parameters:

- 100% galvanised and powder-coated steel
- panes: 6 mm toughened glass
- roof: plexi/ 8 mm cellular polycarbonate with UV filter
optional: safety glass
- 4 foundation points
- multiplication possibility
- full statics for all locations
- shelter closing accessories for shelters with 3 panes:
BW, SH, RD, TD unavailable

Multiplications:

The structure allows creating combined systems:

This ensures not only greater opportunities for equipment arrangements in the commercial establishments but also financial savings.

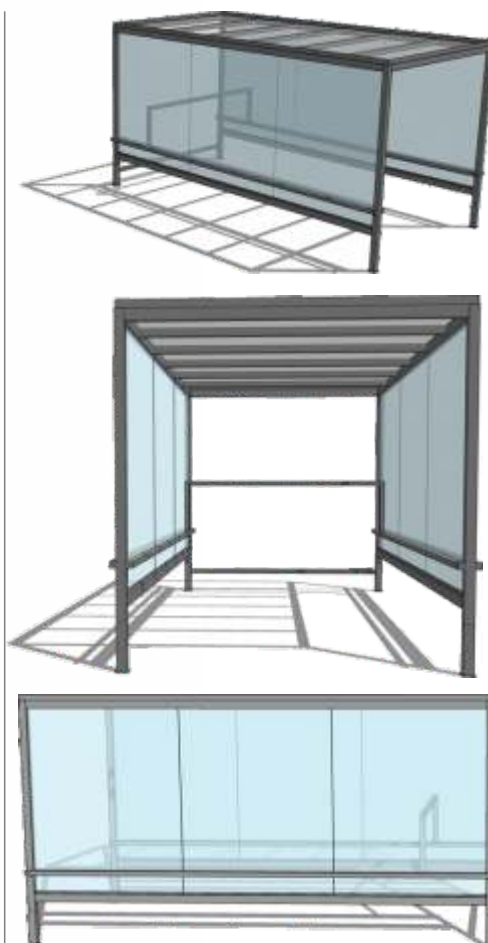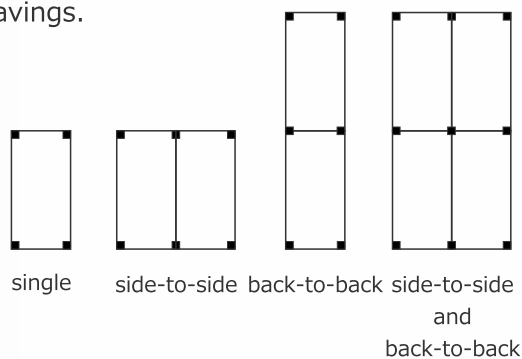

Each our structure is adapted to the weather conditions prevailing in the specific area basing on wind and snow maps.

The production process is carried out on the basis of the standards:

PN EN 1090 -1-2
ISO 3834

Every product has a certification mark:

