

Trolley shelters

A type

CALSSIC AND RELIABLE

Foundation shelter transported as a complete structure and erected on feet. Gabled roof. Steel structure (full RAL colours) made of repetitive spans with 6mm cellular polycarbonate skin. Double anti-corrosive protection ensures trouble-free operation for a long time.

Possible structure modifications:

LR

long roof

SR

short roof

EX

extra (hidden connections)

Possible accessories:

AF

advertising frame

BW

back wall

SH

shields

RD

rolling doors

TD

transparent doors

L

logo

CC

closing crossbeam

Wall filling options:

GS

glass

DP

display

EC

economic


CP

cellular polycarbonate 8mm

A



Available lengths and widths:

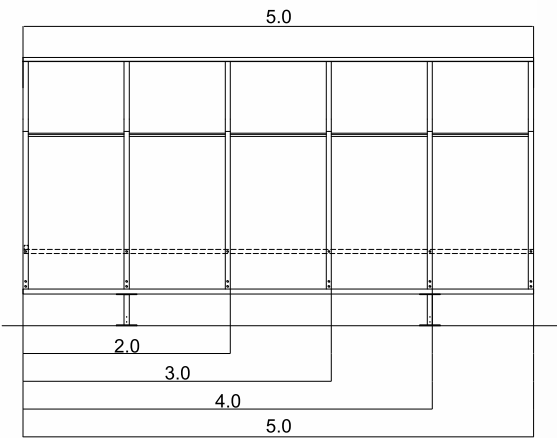

internal width [m]	1.6	2.1	2.4	2.7
number of shopping trolley rows	2	3	3	3
shelter index	A2	A3	A3+	A4
roof lenght [m]				
2.0	•	•	•	•
3.0	•	•	•	•
4.0	•	•	•	•
5.0	•	•	•	•

1.6

A2: 2 x

2.1

A3: 3 x


2.4

A3+: 3 x

2.7

A4: 4 x

Specification (A3+):

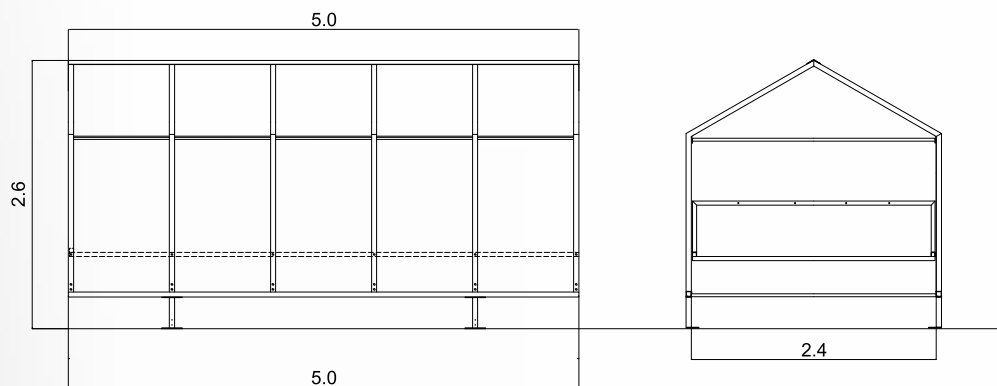

Parameters:

- stal w 100% cynkowana i lakierowana proszkowo
- dach: poliwęglan komorowy 6 mm z osłoną UV
- 4 punkty fundamentowe
- pełna statyka na wszystkie lokalizacje
- dowóz na miejsce montażu w całości za wyjątkiem wiaty 4- rzędowej

Multiplications:

As a single structure the A shelter cannot be multiplied.
However, successive single shelters can be installed behind one another at the same time.



Each our structure is adapted to the weather conditions prevailing in the specific area basing on wind and snow maps.

The production process is carried out on the basis of the standards:

PN EN 1090 -1-2
ISO 3834

Every product has a certification mark:

